

HZFA-V

W

A

Ö

”

┐

”

’



HZFA-V



—

—


—

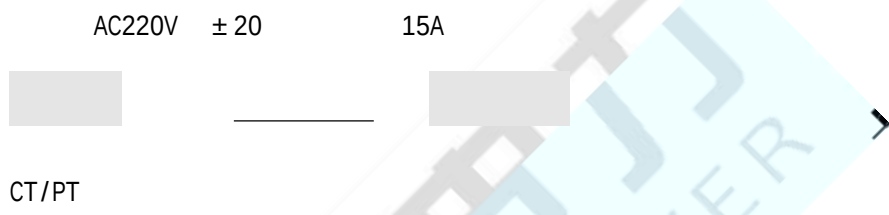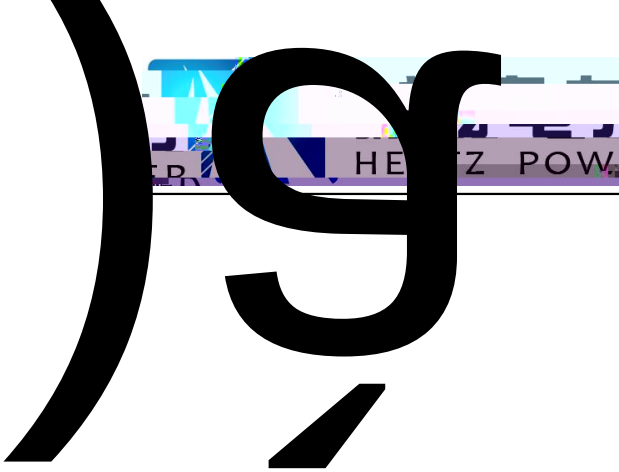


PT

CT

PT

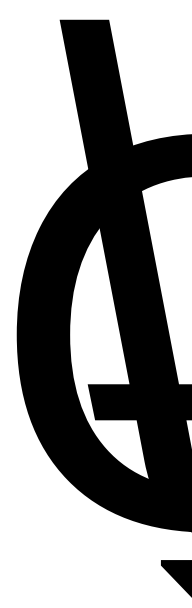

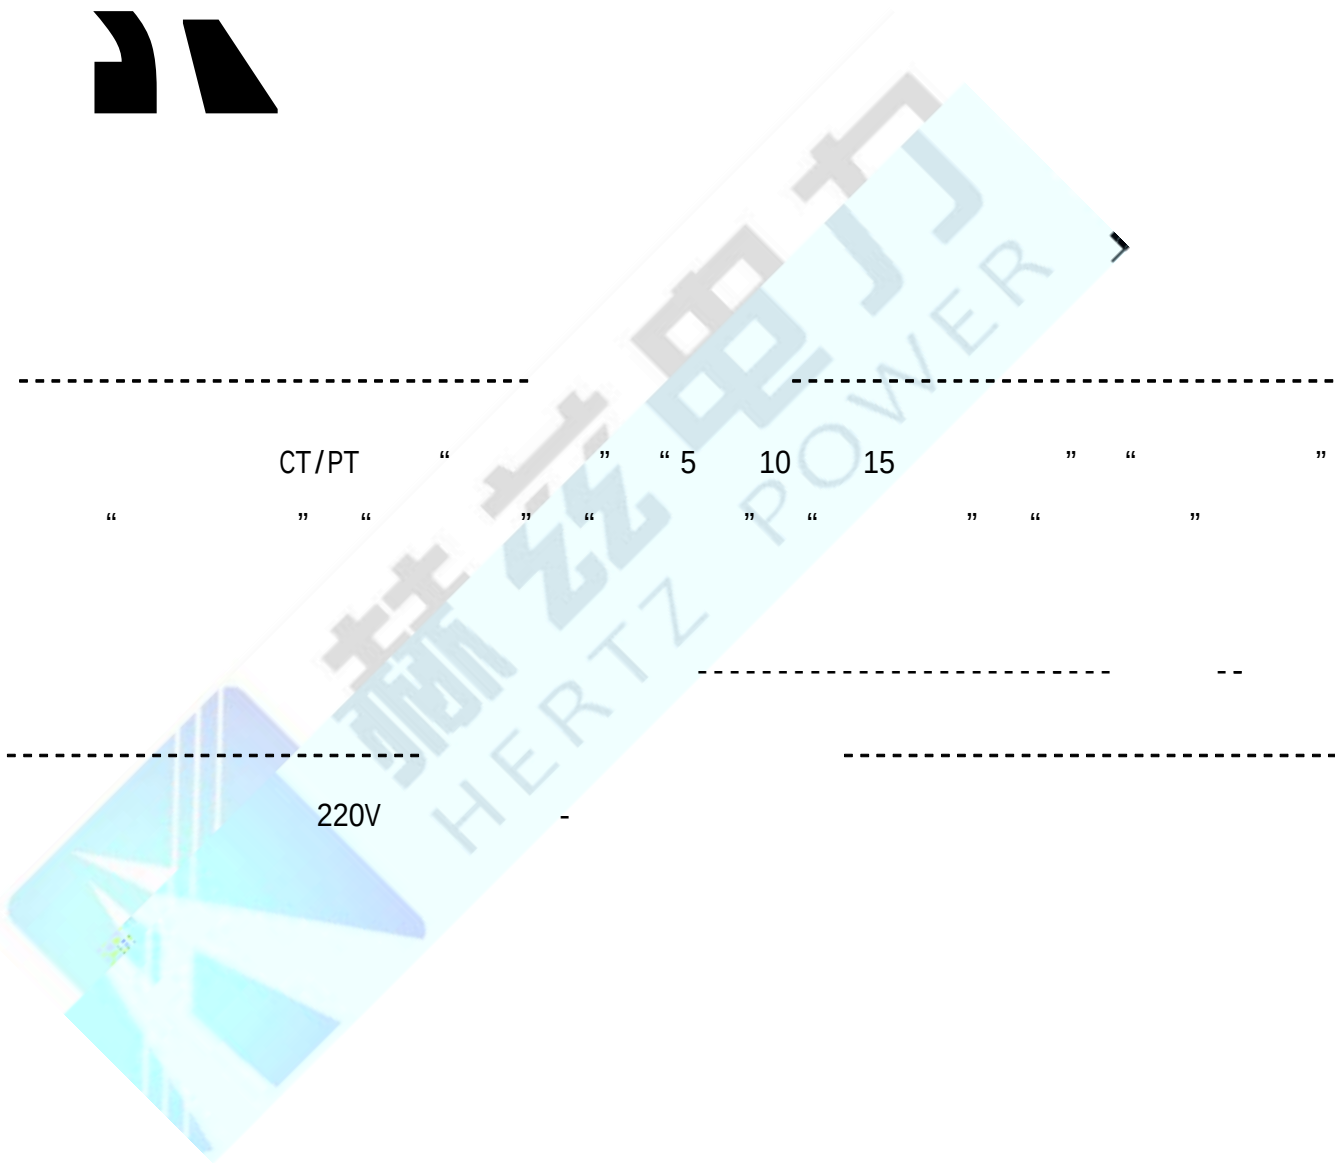

2000

/

RS232

U

20Kg

CT	220V	0—1000V	3KVA	< 0.5%
PT	220V	0—330V	3KVA	< 0.5%
CT	220V	0-8V		< 0.5%
PT	220V	0—1000V		< 0.5%
CT				



220V

CT PT U

全功能互感器综合测试仪

CT 测试

PT 测试

数据查询

U盘转存

系统设置

08-12-28 15:30

CT

CT

CT

A.

CT 参数设置

编号: ABC001

相序: A

Kn: 1



变比: 1000:5

确定

:

CT




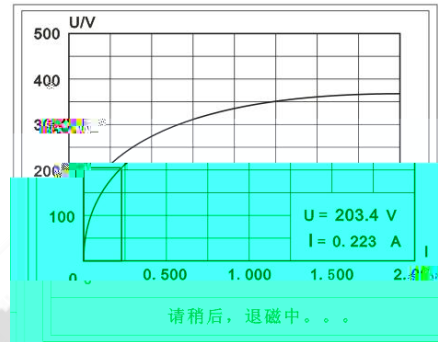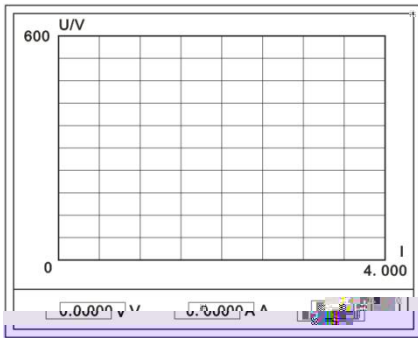

d.



()

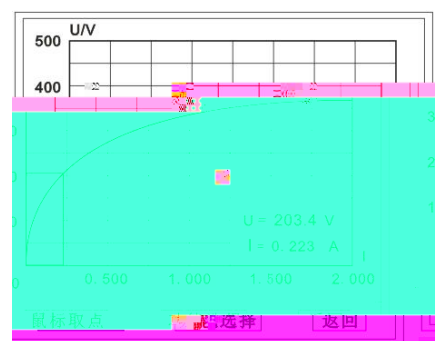





CT

b.

CT

L1 L2

CT

K1 K2

c.



CT

e.

5

200A




E.

4. PT

CT

CT

A. PT

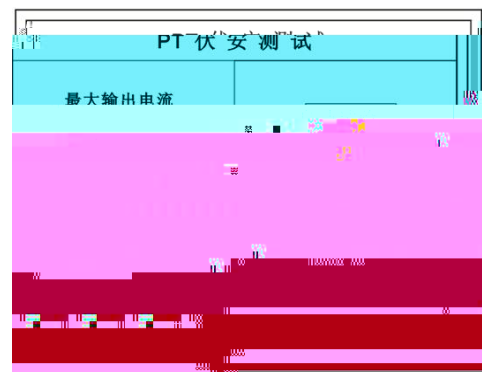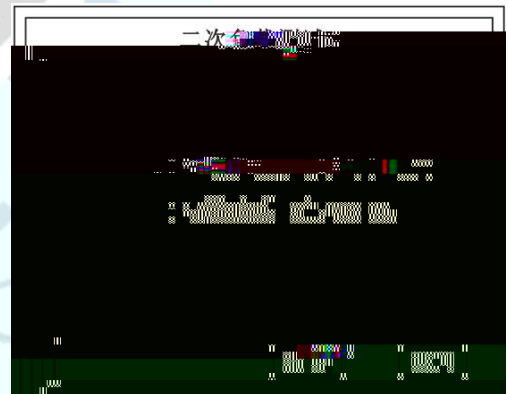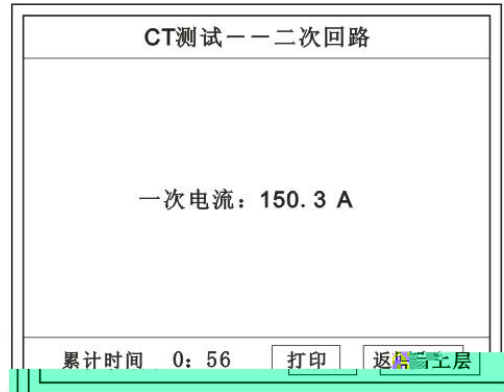

a.



0 - 3 A





0~330V



b.



B. PT



a.




0 - 1000



5

b.

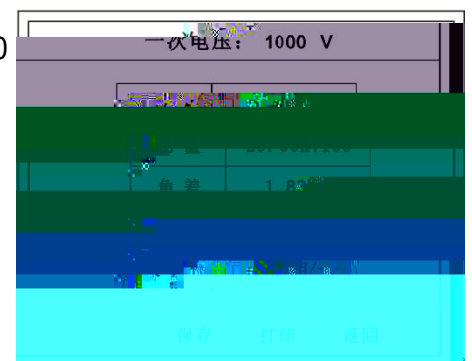

PT

a x

C.

5

1000V

PT测试——二次耐压

一次电压：1000 V
绝缘电流：0.001 V

累计时间 1: 00

5.

11

CT

PT

A. CT

a.

b.

1

11

1

数据查询

请输入：

编号：ABC001

日期：00年 5 月 1 日

确定

取消

[illegible]



6. U



U U 5 U U





U


U U

7.



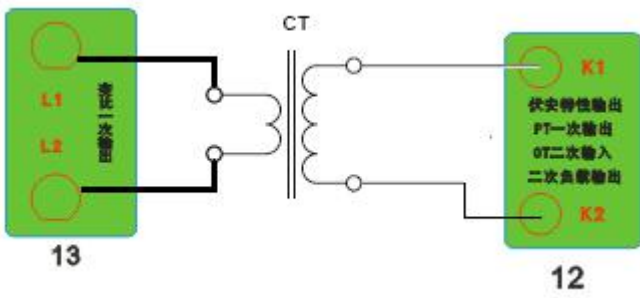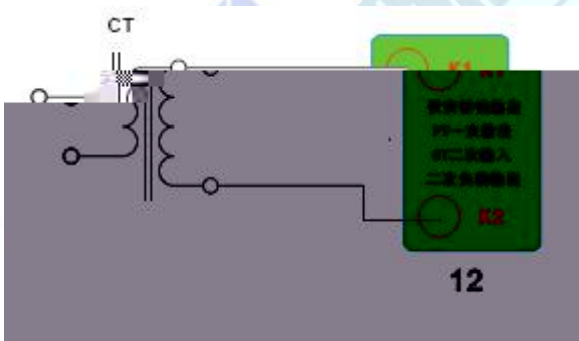

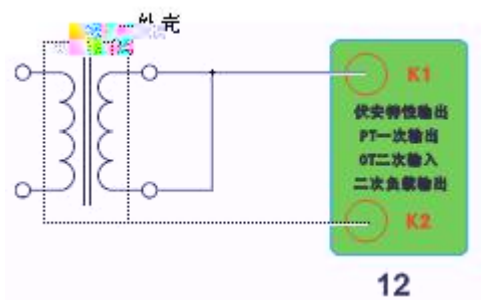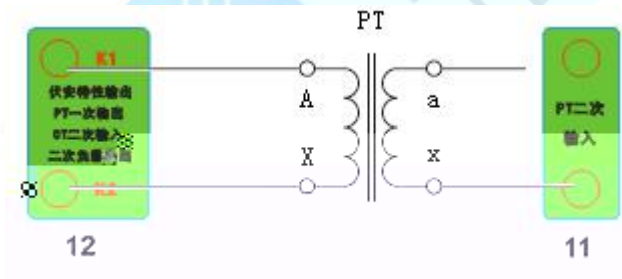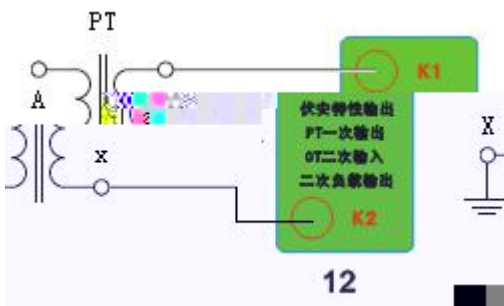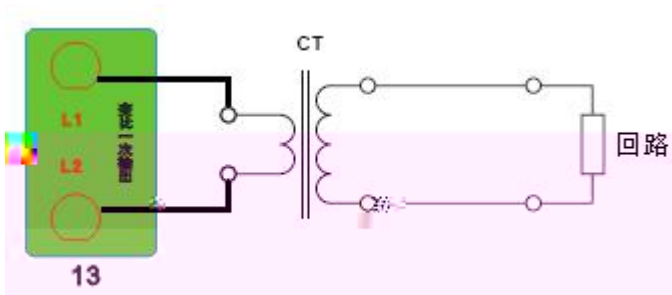

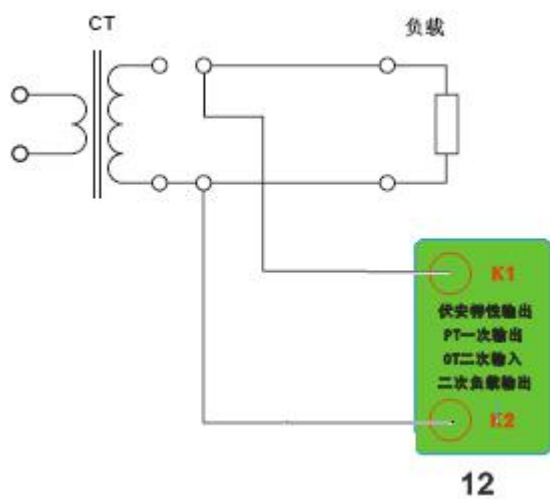

“

”

“

”

1

2

1.

2.

1

2

3

2

24

027-83267669

24

48

4