


HZDR-SS



HZDR-SS

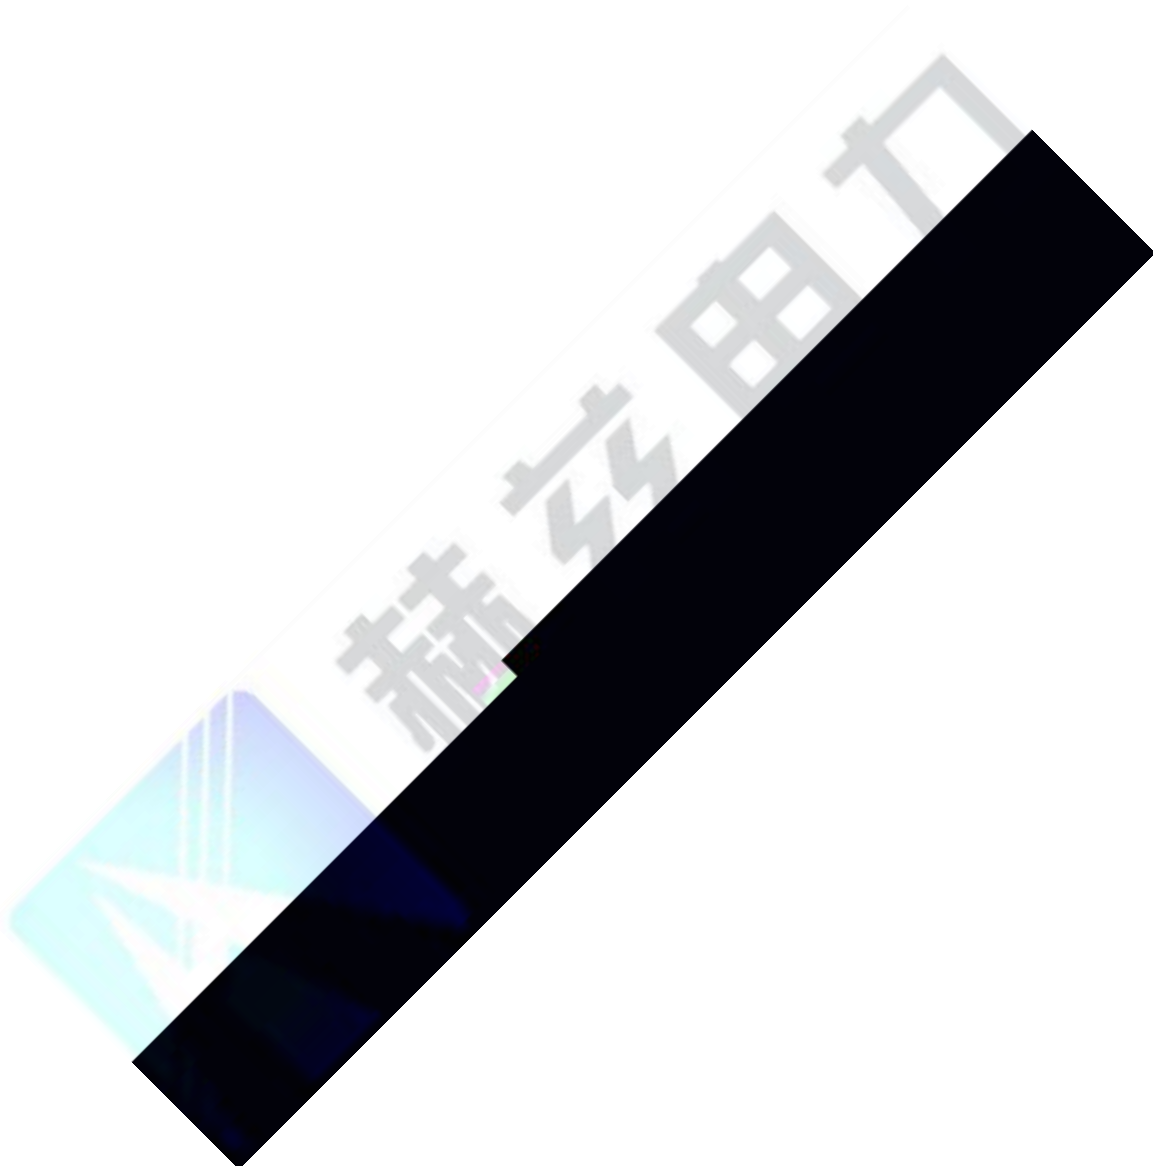

—

“

”

GB3983.2-1989

DL/T840-2003

JB5346-1998

-
-
-
-
-
-
-
-
-
-

；

7.0

1024 × 600

500

U

U

1 100V ± 10% 55Hz
 40V ± 10% 55Hz
 8V ± 10% 55Hz
 2V ± 10% 55Hz

2 :

 : 0.1uF 6000uF ± 1%+0.01uF

 : 50uH 20H ± (3%+0.05uH)

 : 5mA 2A ± (3%+0.05mA)


 : 20mΩ 20kΩ ± (3%+0.1mΩ)

3 5


4 425*335*210 mm

5 8KG

-20 40
≤ 85%RH

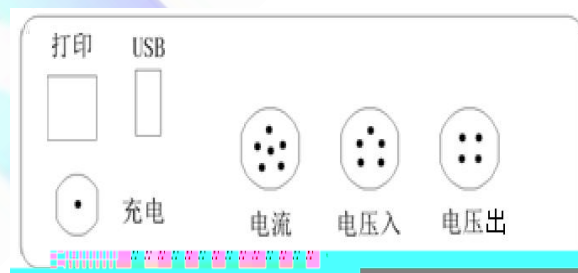




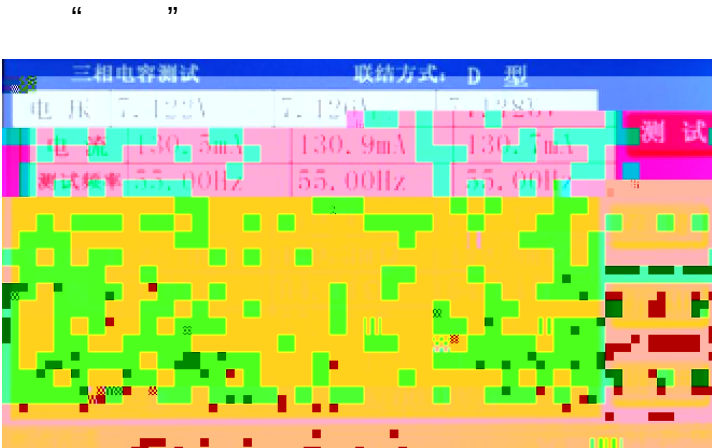

“ ”

CT

2

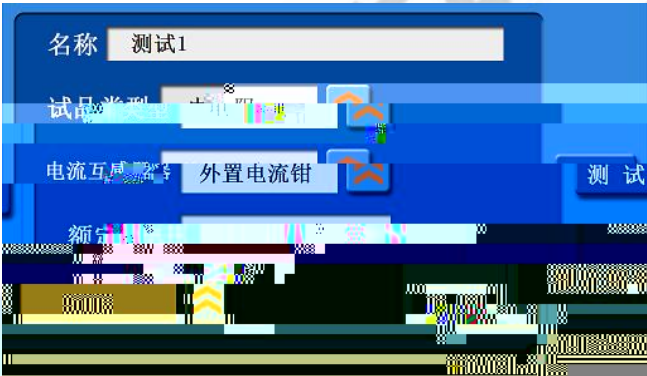

CT





“ ” “ ”

名称: 测试1	单相电容测试	外置电流钳
额定频率: 50Hz	额定电压:	10.000 kV

电 压	4.160V	阻 抗	620.6mΩ
电 流	114.9mA	容 抗	39.81Ω
测试频率	55.00Hz	电 容	79.95uF
角 度	269.0°	容 量	2.512MVar

“ U ”


“ ”

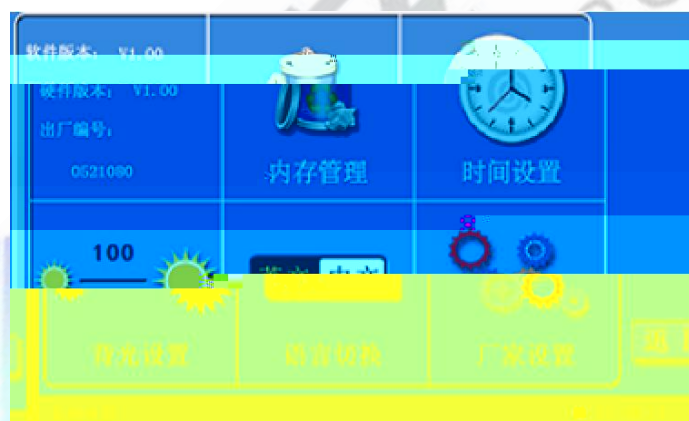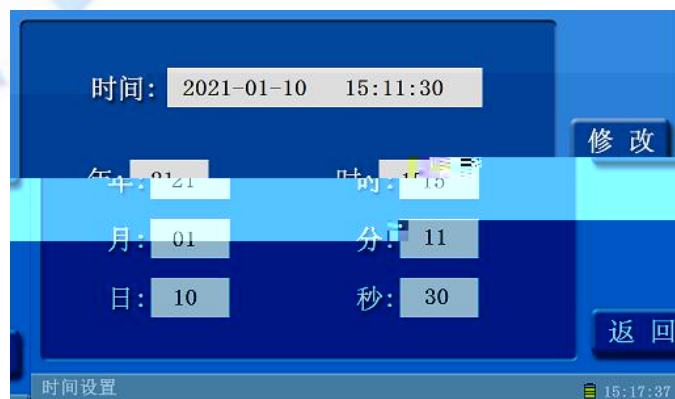[illegible]

Y


Y Yn

1

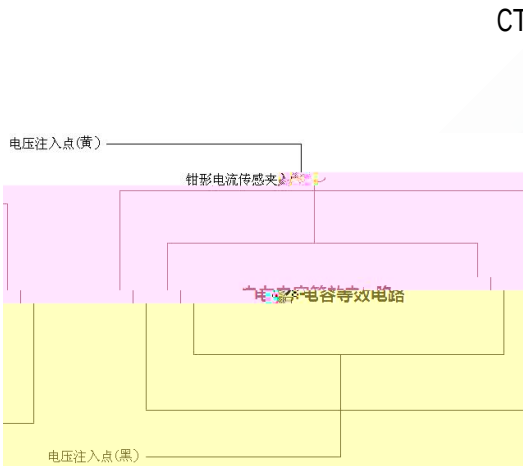

2

1 Y

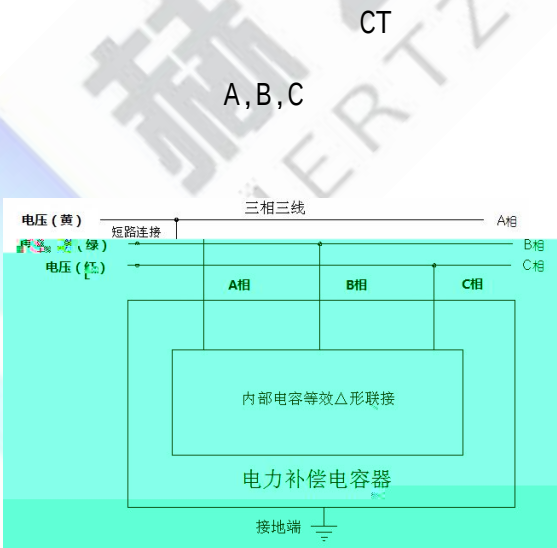

3

Yn CT

A,B,C



赫兹电力
HERTZ POWER

8.1

8.2

8.3

8.4

8.5

8.5

8.6

8.7

1

2

1.

2.

☐ ☐ ☐ ☐

1

2

3

2



24

027-83267669

Ė

